
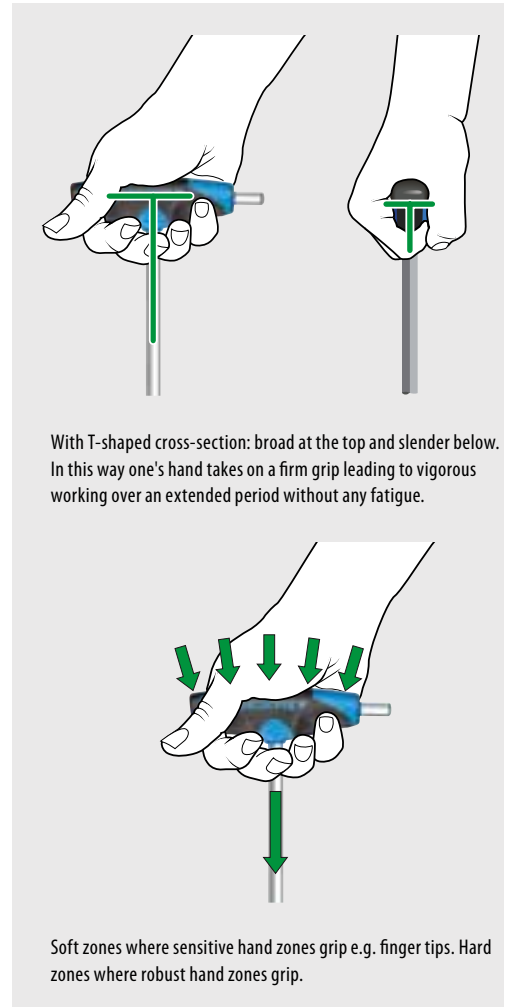


2GT-HANDLE


> 2-component wing handle for high torque level when loosening or tightening. The lengthened wing provides an optimum contact surface for the palm of one's hand. It thus easily transfers considerable forces in a relaxed hand's position.

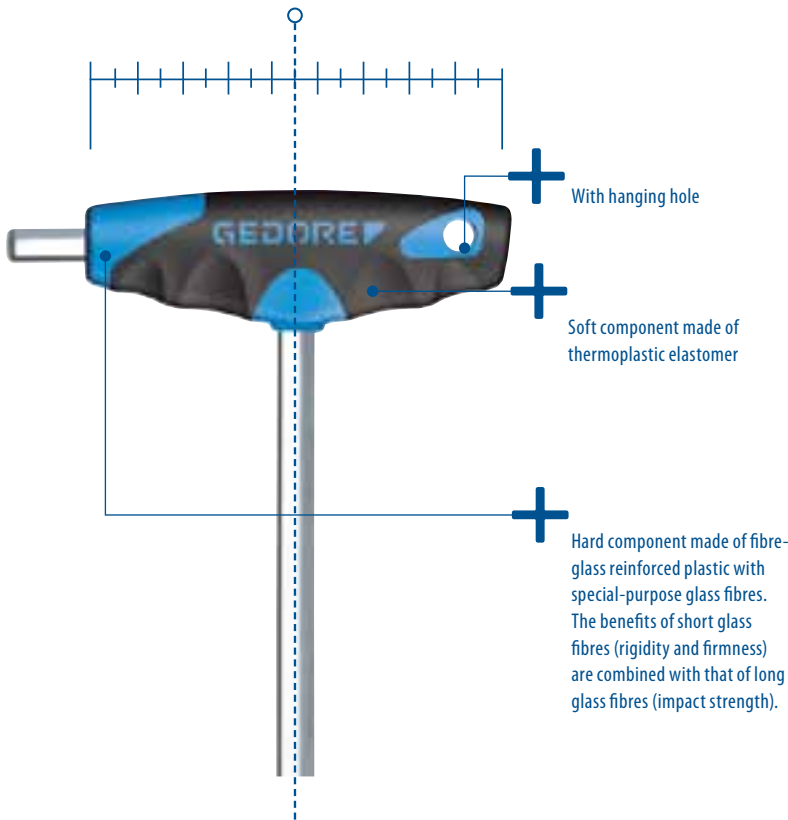

2142 T (MM) HEXAGON ALLEN KEY WITH 2GT-HANDLE

for in-hex screws

- > With hanging hole
- > GEDORE vanadium steel 61CrSIV5, chromated

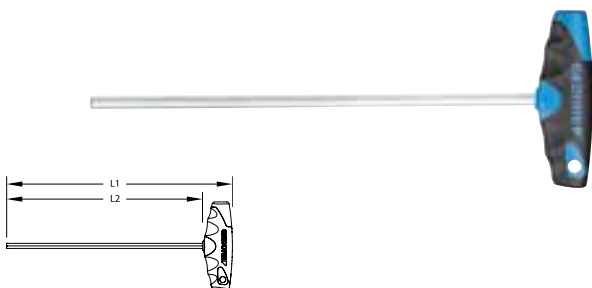


● mm	L ₁	L ₂	⚖	Code	No.
2	152	125	0.061	2647257	2142T2
2,5	152	125	0.091	2647265	2142T2,5
3	152	125	0.071	2647273	2142T3
4	152	125	0.080	2647281	2142T4
5	177	150	0.100	2647303	2142T5
6	188	150	0.140	2647311	2142T6
7	213	175	0.160	2681439	2142T7
8	213	175	0.221	2647338	2142T8
10	238	200	0.201	2647346	2142T10

2142 T (AF) HEXAGON ALLEN KEY WITH 2GT-HANDLE

for in-hex screws

- > With hanging hole
- > GEDORE vanadium steel 61CrSIV5, chromated


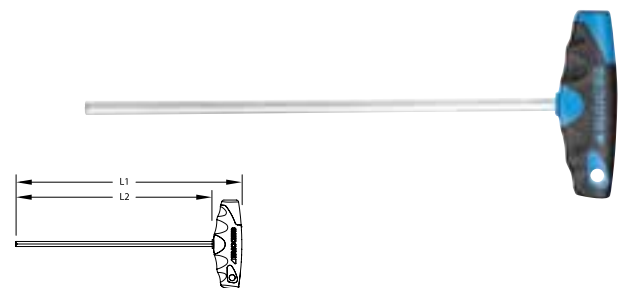


● AF	L ₁	L ₂	⚖	Code	No.
1/8	152	125	0.101	2647354	2142T1/8AF
5/32	152	125	0.121	2647362	2142T5/32AF
3/16	177	150	0.100	2647370	2142T3/16AF
1/4	213	175	0.140	2647389	2142T1/4AF
5/16	213	175	0.221	2647397	2142T5/16AF
3/8	238	200	0.201	2647400	2142T3/8AF

DT 2142 HEXAGON ALLEN KEY WITH 2GT-HANDLE

for in-hex screws

- > With hanging hole
- > With 2 hexagons, same size each end
- > GEDORE vanadium steel 61CrSiV5, chromated

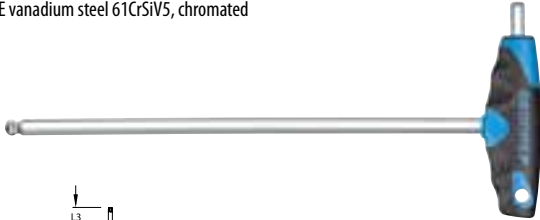


mm	L ₁	L ₂	L ₃	g	Code	No.
2	152	125	15	0.091	2488914	DT 2142 2
2,5	152	125	15	0.071	2498596	DT 2142 2,5
3	152	125	15	0.040	2498618	DT 2142 3
4	152	125	15	0.080	2498626	DT 2142 4
5	177	150	20	0.100	2502631	DT 2142 5
6	188	150	20	0.120	2502658	DT 2142 6
7	213	175	25	0.251	2505487	DT 2142 7
8	213	175	25	0.180	2507447	DT 2142 8
10	238	200	25	0.280	2507471	DT 2142 10

2142 TX WRENCH KEY WITH 2GT-HANDLE


for recessed TORX® screws

- > With hanging hole
- > Chrome-vanadium steel, blade chrome-plated, tip gun-metal finish
- > TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



mm	M	mm	L ₁	L ₂	g	Code	No.
T5	M1,8	1,42	152	125	0.081	2509393	2142 TX T5
T6	M2	1,70	152	125	0.081	2511622	2142 TX T6
T7	M2,5	1,99	152	125	0.081	2511657	2142 TX T7
T8	M2,5	2,31	152	125	0.051	2513072	2142 TX T8
T9	M3	2,50	152	125	0.071	2513102	2142 TX T9
T10	M3 - M3,5	2,74	152	125	0.061	2513749	2142 TX T10
T15	M3,5 - M4	3,27	152	125	0.091	2516934	2142 TX T15
T20	M4 - M5	3,86	152	125	0.081	2519062	2142 TX T20
T25	M4,5 - M5	4,43	177	150	0.091	2519186	2142 TX T25
T27	M4,5 - M6	4,99	177	150	0.100	2521571	2142 TX T27
T30	M6 - M7	5,52	188	150	0.100	2521598	2142 TX T30
T40	M7 - M8	6,65	213	175	0.140	2521601	2142 TX T40
T45	M8 - M10	7,82	213	175	0.160	2521636	2142 TX T45
T50	M10	8,83	238	200	0.180	2521644	2142 TX T50

1500 CT2-DT 2142





>110

DT 2143 KTX CRANKED SOCKET KEY WITH 2GT-HANDLE

for recessed TORX® screws



- > Working angle approx. 25°
- > With hanging hole
- > Chrome-vanadium steel, blades chrome-plated, tip phosphated
- > TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA

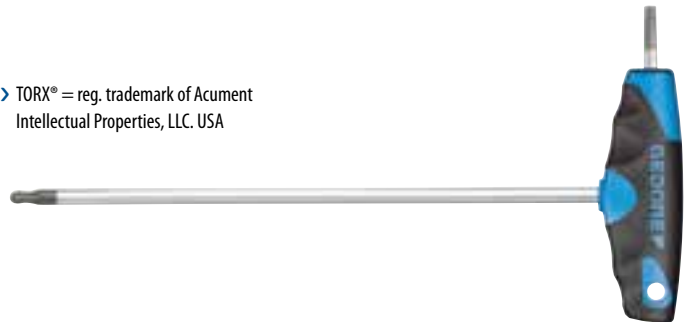

mm	M	mm	L ₁	L ₂	L ₃	g	Code	No.
T10	M3 - M3,5	2,74	152	125	15	0.091	2647486	DT 2143 KTX T10
T15	M3,5 - M4	3,27	152	125	15	0.081	2647494	DT 2143 KTX T15
T20	M4 - M5	3,86	152	125	15	0.071	2647508	DT 2143 KTX T20
T25	M4,5 - M5	4,43	177	150	20	0.121	2647516	DT 2143 KTX T25
T27	M4,5 - M6	4,99	177	150	20	0.120	2647524	DT 2143 KTX T27
T30	M6 - M7	5,52	188	150	25	0.140	2647532	DT 2143 KTX T30
T40	M7 - M8	6,65	213	175	25	0.180	2647540	DT 2143 KTX T40

2133 T NUT DRIVER WITH 2GT-HANDLE



- > With hanging hole
- > Head depth 25 mm
- > GEDORE vanadium steel 31CrV3, matt chrome-plated

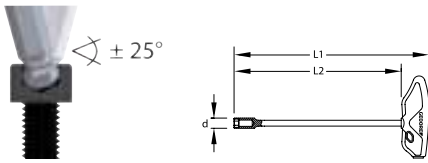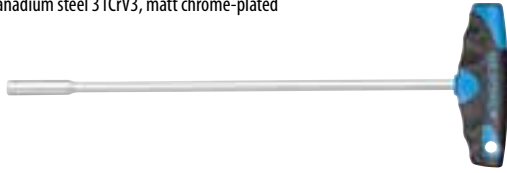

Ø mm	L ₁	L ₂	d		Code	No.
5.5	257	230	8	0.101	2647621	2133 T 5,5
6.0	257	230	9	0.101	2647648	2133 T 6
7.0	268	230	11	0.101	2647656	2133 T 7
8.0	268	230	12	0.180	2647664	2133 T 8
9.0	268	230	13	0.180	2647672	2133 T 9
10.0	268	230	14	0.180	2647680	2133 T 10
11.0	268	230	16	0.200	2647699	2133 T 11
12.0	268	230	17	0.220	2647702	2133 T 12
13.0	268	230	18	0.240	2647710	2133 T 13

42 DKEL - THE FIRST WITH TWO BALL ENDS

- > Two ball ends and an extra short angle side for working optimally in confined spaces
- > Positive or negative inclination produces a possible 50° angle of approach (+/- 25°) to the screw axis
- > Projecting hindrances can be got round with the two ball ends - rapid work is the outcome
- > The GEDORE vanadium steel 59CrV4 with its high manganese share ensures the screwdriver has that strength needed

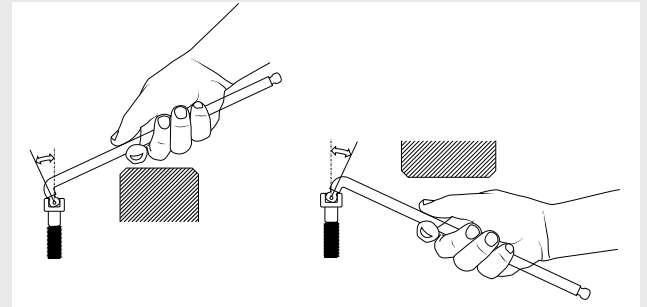

DTT 42 HEXAGON ALLEN KEY

for in-hex screws

- > With 3 hexagons, same size each end
- > T-handle fixed



Ø mm	L ₁	L ₂	L ₃	Ø		Code	No.
3	150	75	30	5.0	0.042	1669540	DTT 42 3
4	180	90	35	6.0	0.064	1669559	DTT 42 4
5	180	90	35	7.0	0.092	1669567	DTT 42 5
6	210	105	40	8.0	0.134	1669575	DTT 42 6
8	250	125	50	9.5	0.224	1669583	DTT 42 8
10	300	150	60	12.0	0.418	1669591	DTT 42 10

H 42 DKEL-88 HEXAGON ALLEN KEY SET

for in-hex screws, extra long, with double ball end

- > Particularly suitable for confined spaces in view of a double ball end and short angled side
- > Easy to use where normal hexagon allen keys would fail thanks to improved accessibility and a low profile
- > Rapid progress in work since the two ball ends allow protrusions to be gone round
- > Reduces the risk of injury to the fingers when working on flat surfaces
- > GEDORE vanadium steel 59CrV4, zinc-plated




Contents		Code	No.
● mm 42 DKEL 2 2,5 3 4 5 6 8 10	0.400	2797186	H 42 DKEL-88

42 DKEL HEXAGON ALLEN KEY

for in-hex screws, extra long, with double ball end

- > Particularly suitable for confined spaces in view of a double ball end and short angled side
- > Easy to use where normal hexagon allen keys would fail thanks to improved accessibility and a low profile
- > Rapid progress in work since the two ball ends allow protrusions to be gone round
- > Reduces the risk of injury to the fingers when working on flat surfaces
- > GEDORE vanadium steel 59CrV4, zinc-plated

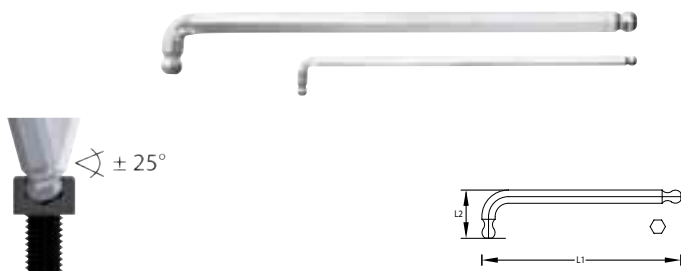

mm	L ₁	L ₂	kg	Code	No.
1,5	89	7.5	0.003	2797062	42 DKEL 1,5
2	102	9.0	0.004	2797089	42 DKEL 2
2,5	115	10.0	0.006	2797097	42 DKEL 2,5
3	129	11.5	0.010	2797100	42 DKEL 3
4	144	14.5	0.018	2797119	42 DKEL 4
5	165	16.5	0.050	2797127	42 DKEL 5
6	186	19.0	0.060	2797135	42 DKEL 6
7	197	20.5	0.070	2797143	42 DKEL 7
8	205	22.0	0.090	2797151	42 DKEL 8
10	227	28.0	0.160	2797178	42 DKEL 10

H 42 KEL-88 HEXAGON ALLEN KEY SET

for in-hex screws, extra long, with ball end

- > In blue plastic holder (LPDE)
- > GEDORE vanadium steel 59CrV4, chromated



Contents	kg	Code	No.
mm 42 KEL 2 2,5 3 4 5 6 8 10	0.415	1523988	H 42 KEL-88

H 42 EL-88 HEXAGON ALLEN KEY SET

for in-hex screws, extra long

- > In blue plastic holder (LPDE)
- > Acc. to DIN ISO 2936
- > GEDORE vanadium steel 61CrSiV5, zinc-plated



Contents	kg	Code	No.
mm 42 EL 2 2,5 3 4 5 6 8 10	0.425	1505416	H 42 EL-88

42 KEL HEXAGON ALLEN KEY

for in-hex screws, extra long, with ball end

- > GEDORE vanadium steel 59CrV4, chrome-plated



mm	L ₁	L ₂	kg	Code	No.
1,5	91.5	15.5	0.003	1563556	42 KEL 1,5
2	102.0	18.0	0.004	6370090	42 KEL 2
2,5	114.5	20.5	0.006	6370170	42 KEL 2,5
3	129.0	23.0	0.010	6370250	42 KEL 3
4	144.0	29.0	0.019	6370330	42 KEL 4
5	165.0	33.0	0.033	6370410	42 KEL 5
6	186.0	38.0	0.053	6370680	42 KEL 6
7	197.0	41.0	0.076	1729241	42 KEL 7
8	208.0	44.0	0.103	6370760	42 KEL 8
10	234.0	50.0	0.179	6370840	42 KEL 10
12	262.0	57.0	0.287	6370920	42 KEL 12

H 42 EL-88 A HEXAGON ALLEN KEY SET

for in-hex screws, extra long

- > In blue plastic holder (LPDE)
- > GEDORE vanadium steel 61CrSiV5, zinc-plated




Contents	kg	Code	No.
AF 42 EL 5/64 3/32 1/8 5/32 3/16 7/32 1/4 5/16"	0.300	1543555	H 42 EL-88 A



42 EL (MM) HEXAGON ALLEN KEY

for in-hex screws, extra long

- > Acc. to DIN ISO 2936
- > GEDORE vanadium steel 61CrSiV5, zinc-plated




● mm	L ₁	L ₂	⚖	Code	No.
2	102.0	18.0	0.004	6350810	42 EL 2 (5/64AF)
2,5	114.5	20.5	0.007	6351030	42 EL 2,5
3	129.0	23.0	0.010	6351110	42 EL 3
4	144.0	29.0	0.019	6351380	42 EL 4
5	165.0	33.0	0.033	6351460	42 EL 5
5,5	186.0	38.0	0.047	1543342	42 EL 7/32AF (5,5MM)
6	186.0	38.0	0.054	6351540	42 EL 6
7	194.0	41.0	0.750	2977486	42 EL 7
8	208.0	44.0	0.104	6351620	42 EL 8
10	234.0	50.0	0.184	6351700	42 EL 10
12	262.0	57.0	0.293	6351890	42 EL 12
14	294.0	70.0	0.453	6351970	42 EL 14

42 EL (AF) HEXAGON ALLEN KEY

for in-hex screws, extra long

- > GEDORE vanadium steel 61CrSiV5, zinc-plated



● AF	L ₁	L ₂	⚖	Code	No.
5/64	102.0	18.0	0.004	6350810	42 EL 2 (5/64AF)
3/32	114.5	20.5	0.006	1543377	42 EL 3/32AF
1/8	129.0	23.0	0.011	1543318	42 EL 1/8AF
5/32	144.0	29.0	0.019	1543326	42 EL 5/32AF
3/16	165.0	33.0	0.030	1543334	42 EL 3/16AF
7/32	186.0	38.0	0.047	1543342	42 EL 7/32AF (5,5MM)
1/4	197.0	41.0	0.065	1543369	42 EL 1/4AF
5/16	208.0	44.0	0.103	1543350	42 EL 5/16AF
3/8	234.0	50.0	0.167	1543385	42 EL 3/8AF
1/2	277.0	63.0	0.355	1543393	42 EL 1/2AF
9/16	294.0	70.0	0.475	1543407	42 EL 9/16AF

PH 42-88 HEXAGON ALLEN KEY SET

for in-hex screws

- > In blue plastic holder
- > GEDORE vanadium steel 61CrSiV5, zinc-plated



Contents	⚖	Code	No.
● mm 42 2,5 3 4 5 6 8 10	0.245	6352000	PH 42-88

H 42-10 HEXAGON ALLEN KEY SET

for in-hex screws

- > In blue plastic holder (LPDE)
- > Acc. to DIN ISO 2936
- > GEDORE vanadium steel 61CrSiV5, zinc-plated



Contents	⚖	Code	No.
● mm 42 1,3 1,5 2 2,5 3 4 5 6 8 10	0.259	1505408	H 42-10

42 (MM) HEXAGON ALLEN KEY SET

for in-hex screws

- > In blue PVC wallet
- > GEDORE vanadium steel 61CrSiV5, zinc-plated




Contents		Code	No.
mm 42 2 2,5 3 4 5 6 8	0.144	6347510	42-07
mm 42 2,5 3 4 5 6 8 10	0.254	6349050	42-70

Contents		Code	No.
mm 42 3 4 5 6 8 10 12 14	0.716	6347780	42-08
mm 42 2 2,5 3 4 5 6 7 8 10	0.297	6347860	42-09

42 (MM) HEXAGON ALLEN KEY

for in-hex screws

- > Acc. to DIN ISO 2936
- > GEDORE vanadium steel 61CrSiV5, zinc-plated up to size 12 mm, chrome-plated up from size 14 mm
- * not standardised




mm	L ₁	L ₂		Code	No.
0,7	33.0	7.0	0.001	6342200	42 0,7
0,9	33.0	11.0	0.001	6342390	42 0,9
1,3	41.0	13.0	0.001	6342470	42 1,3
1,5	46.5	15.5	0.001	6340260	42 1,5
2	52.0	18.0	0.002	6340340	42 2 (5/64AF)
2,5	58.5	20.5	0.004	6340420	42 2,5
3	66.0	23.0	0.006	6340500	42 3
4	74.0	29.0	0.011	6340690	42 4
5	85.0	33.0	0.019	6340770	42 5
5,5	*	82.0	0.022	6344840	42 7/32AF (5,5MM)
6		96.0	0.031	6340850	42 6
7	*	102.0	0.044	6340930	42 7

mm	L ₁	L ₂		Code	No.
8	108.0	44.0	0.061	6341070	42 8
9	*	114.0	0.081	6341150	42 9
10	122.0	50.0	0.106	6341230	42 10
12	137.0	57.0	0.169	6341310	42 12
14	154.0	70.0	0.266	6341580	42 14
17	177.0	80.0	0.430	6341660	42 17
19	199.0	89.0	0.602	6341740	42 19
22	222.0	102.0	0.907	6341820	42 22
24	248.0	114.0	1.211	6341900	42 24
27	277.0	127.0	1.711	6342550	42 27
30	315.0	142.0	2.423	6342630	42 30
32	347.0	157.0	3.010	6342710	42 32

H 42-88 A HEXAGON ALLEN KEY SET

for in-hex screws

- > In blue plastic holder (LPDE)
- > GEDORE vanadium steel 61CrSiV5, zinc-plated

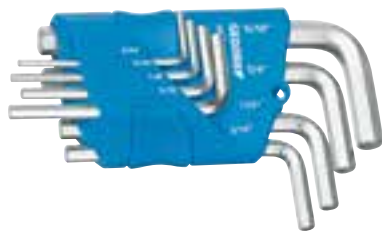

Contents		Code	No.
"AF 42 5/64 3/32 1/8 5/32 3/16 7/32 1/4 5/16"	0.172	1505424	H 42-88 A

42 (AF) HEXAGON ALLEN KEY SET

for in-hex screws

- > In blue PVC wallet
- > GEDORE vanadium steel 61CrSiV5, zinc-plated




Contents		Code	No.
"AF 5/64 3/32 1/8 5/32 3/16 7/32 1/4"	0.103	6348750	42-07 A
"AF 1/8 5/32 3/16 1/4 5/16 3/8 1/2 9/16"	0.731	6348830	42-08 A
"AF 5/64 3/32 1/8 5/32 3/16 7/32 1/4 5/16 3/8"	0.257	6348910	42-09 A

42 (AF) HEXAGON ALLEN KEY

for in-hex screws

> GEDORE vanadium steel 61CrSiV5, zinc-plated up to size 1/2", chrome-plated up from size 9/16"

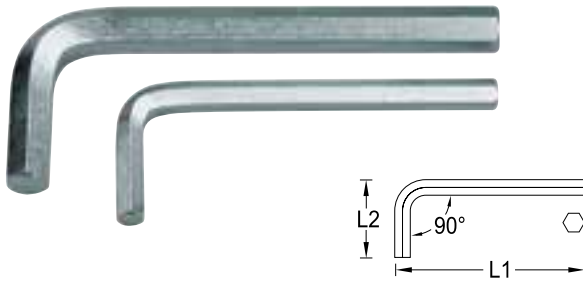

● "AF	L ₁	L ₂	⚖ kg	Code	No.
3/64	41.0	13.0	0.002	6342120	42 3/64AF
1/16	46.5	15.5	0.002	6342040	42 1/16AF
3/32	56.5	20.5	0.004	6344330	42 3/32AF
5/64	52.0	18.0	0.002	6340340	42 2 (5/64AF)
1/8	60.0	23.0	0.006	6344410	42 1/8AF
5/32	67.0	26.0	0.010	6344680	42 5/32AF
3/16	73.0	30.0	0.015	6344760	42 3/16AF
7/32	82.0	32.0	0.022	6344840	42 7/32AF (5,5MM)
1/4	92.0	36.5	0.035	6344920	42 1/4AF
5/16	102.0	43.0	0.059	6345060	42 5/16AF
3/8	115.0	49.0	0.094	6345140	42 3/8AF
1/2	142.0	61.0	0.205	6345220	42 1/2AF
9/16	154.0	66.0	0.274	6345300	42 9/16AF
5/8	168.0	76.0	0.376	6345490	42 5/8AF
3/4	199.0	89.0	0.309	6345570	42 3/4AF


42 Z HEXAGON ALLEN KEY

with pilot, for in-hex screws

> Acc. to DIN 6911

> Chrome-vanadium steel, zinc-plated

* not standardised

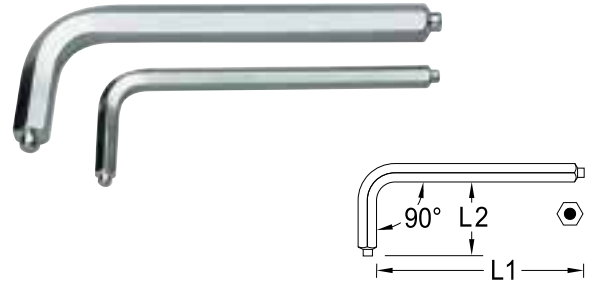

● mm	L ₁	L ₂	⚖ kg	Code	No.
3	63	20	0.006	6342980	42 Z 3
4	70	25	0.010	6343010	42 Z 4
5	80	28	0.019	6343280	42 Z 5
6	90	32	0.031	6343360	42 Z 6
7	*	34	0.042	6343440	42 Z 7
8	100	36	0.058	6343520	42 Z 8
10	112	40	0.100	6343600	42 Z 10
12	125	45	0.162	6343790	42 Z 12
14	140	56	0.254	6343870	42 Z 14
17	160	63	0.418	6343950	42 Z 17
19	180	70	0.584	6344090	42 Z 19

S 42-09 A HEXAGON ALLEN KEY SET

for in-hex screws

> On key ring with quick release

> GEDORE vanadium steel 61CrSiV5, zinc-plated



Contents	⚖ kg	Code	No.
● "AF 42 5/64 3/32 1/8 5/32 3/16 7/32 1/4 5/16 3/8"	0.273	6348160	S 42-09 A

S 42-07 HEXAGON ALLEN KEY SET

for in-hex screws

> On key ring with quick release

> GEDORE vanadium steel 61CrSiV5, zinc-plated



Contents	⚖ kg	Code	No.
● mm 42 2,5 3 4 5 6 8	0.162	6347430	S 42-07

SCL 42-70 HEXAGON ALLEN KEY SET

for in-hex screws

- > In robust metal clip
- > GEDORE vanadium steel 61CrSiV5, zinc-plated



Contents		Code	No.
● mm 2,5 3 4 5 6 8 10	0.360	6347350	SCL 42-70

SCL 42 K-70 HEXAGON ALLEN KEY SET

for in-hex screws

- > In robust metal clip
- > Execution K with ball end
- > GEDORE vanadium steel 61CrSiV5, zinc-plated



Contents		Code	No.
● mm 2,5 3 4 5 6 8 10	0.361	6371140	SCL 42 K-70

SCL 42-90 A HEXAGON ALLEN KEY SET

for in-hex screws

- > In robust metal clip
- > GEDORE vanadium steel 61CrSiV5, zinc-plated



Contents		Code	No.
● "AF 5/64 3/32 7/64 1/8 9/64 5/32 3/16 7/32 1/4"	0.260	6354800	SCL 42-90 A

SCL 43 TX-80 CRANKED SOCKET KEY SET

for recessed TORX® screws

- > In robust metal clip
- > TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA




Contents		Code	No.
● T9 T10 T15 T20 T25 T27 T30 T40	0.286	6346460	SCL 43 TX-80

42 X CRANKED ALLEN SOCKET SCREWDRIVER

for multi-point screws XZN

- > Acc. to DIN 65253, tips acc. to DIN 2325
- > GEDORE vanadium steel 50CrV4, chromated

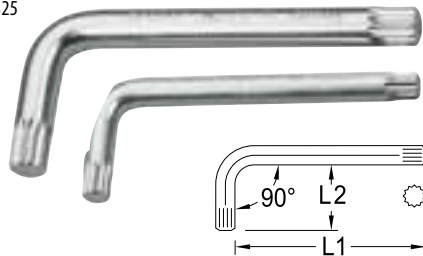


					Code	No.
M 4	63	20	0.009	1531212	42 X 4	
M 5	75	30	0.015	6350060	42 X 5	
M 6	86	34	0.025	6350140	42 X 6	
M 8	98	40	0.043	6350220	42 X 8	
M 10	110	46	0.085	6350300	42 X 10	
M 12	124	52	0.124	6350490	42 X 12	
M 14	139	59	0.191	6350570	42 X 14	
M 16	156	72	0.308	6350650	42 X 16	
M 18	178	81	0.333	6350730	42 X 18	

43 CRANKED SOCKET KEY

for multi-spline screws RIBE®

- > GEDORE vanadium steel 50CrV4, chromated
- > RIBE® = reg. trademark of Richard Bergner GmbH & Co. KG, Schwabach, Germany

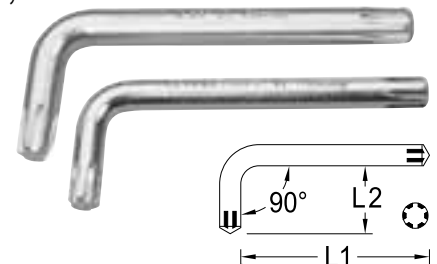


					Code	No.
M5	71	25	0.016	6352270	43 5	
M6	80	28	0.025	6352350	43 6	
M8	90	32	0.049	6352430	43 8	
M10	100	36	0.084	6352510	43 10	
M12	112	40	0.135	6352780	43 12	
M14	125	45	0.203	6352860	43 14	

H 43 TX

CRANKED SOCKET KEY SET

for recessed TORX® screws

- > In blue LDPE holder
- > Chrome-vanadium steel 50CrV4, gun-metal finish
- > TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA

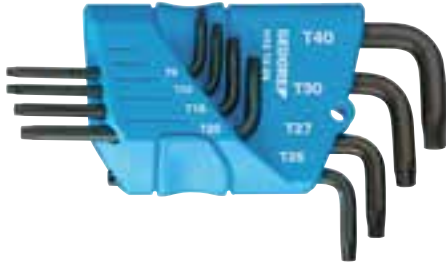

Contents	kg	Code	No.
43 TX T7 T8 T9 T10 T15 T20 T25 T30 T40	0.120	1531417	H 43 TX-09
43 TX T9 T10 T15 T20 T25 T27 T30 T40	0.129	1531425	H 43 TX-88
43 TX T10 T15 T20 T25 T27 T30 T40 T45	0.168	1531433	H 43 TX-08

43 TX-09

CRANKED SOCKET KEY SET

for recessed TORX® screws

- > In blue PVC wallet
- > Chrome-vanadium steel 50CrV4, gun-metal finish
- > TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



Contents	kg	Code	No.
43 TX T7 T8 T9 T10 T15 T20 T25 T30 T40	0.115	6360960	43 TX-09

43 TX

CRANKED SOCKET KEY

for recessed TORX® screws

- > Chrome-vanadium steel 50CrV4, gun-metal finish
- > TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA




⊕	M	mm	L ₁	L ₂	kg	Code	No.
T6	M2	1,69	42	16	0.003	6363550	43 TX T6
T7	M2,5	1,99	48	16	0.003	6363630	43 TX T7
T8	M2,5	2,31	48	16	0.004	6363710	43 TX T8
T9	M3	2,50	48	16	0.004	6363980	43 TX T9
T10	M3 - M3,5	2,74	51	17	0.005	6364010	43 TX T10
T15	M3,5 - M4	3,27	54	18	0.006	6364280	43 TX T15
T20	M4 - M5	3,86	57	19	0.008	6364360	43 TX T20
T25	M4,5 - M5	4,43	60	20	0.010	6364440	43 TX T25
T27	M4,5 - M6	4,99	64	21	0.016	6364520	43 TX T27
T30	M6 - M7	5,52	70	24	0.022	6364600	43 TX T30
T40	M7 - M8	6,65	76	26	0.031	6364790	43 TX T40
T45	M8 - M10	7,82	83	29	0.046	6364870	43 TX T45
T50	M10	8,83	95	32	0.060	6364950	43 TX T50
T55	M12	11,22	108	35	0.122	6365090	43 TX T55
T60	M14	13,25	120	38	0.187	6365170	43 TX T60

H 43 KTX-07

CRANKED SOCKET KEY SET

for recessed TORX® screws

- > In blue LDPE holder
- > With ball end
- > Chrome-vanadium steel 50CrV4, gun-metal finish
- > TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA

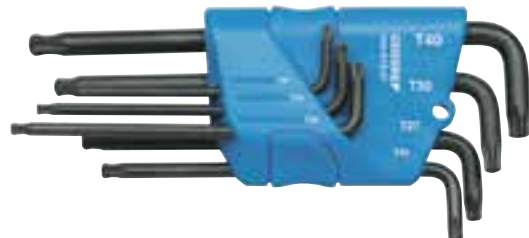

Contents	kg	Code	No.
43 KTX T10 T15 T20 T25 T27 T30 T40	0.169	1531441	H 43 KTX-07

43 KTX CRANKED SOCKET KEY

for recessed TORX® screws, with ball end

- > Working angle approx. 25°
- > Chrome-vanadium steel, gun-metal finish
- > TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



⊕	mm	mm	L ₁	L ₂	kg	Code	No.
T10	M3 - M3,5	2,74	73	17	0.006	6367110	43 KTX T10
T15	M3,5 - M4	3,27	83	17	0.009	6367380	43 KTX T15
T20	M4 - M5	3,86	94	18	0.012	6367460	43 KTX T20
T25	M4,5 - M5	4,43	96	18	0.015	6367540	43 KTX T25
T27	M4,5 - M6	4,99	106	20	0.024	6367620	43 KTX T27
T30	M6 - M7	5,52	119	24	0.033	6367700	43 KTX T30
T40	M7 - M8	6,65	132	26	0.049	6367890	43 KTX T40

708 TORX® GAUGE

- > Easy identification of TORX® sizes, internal E4-E16, external T10-T60
- > TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



Contents	kg	Code	No.
⊕ E4 - E16	0.022	1394428	708
⊕ T10 - T60			

173 CRANKED SCREWDRIVER

for slotted head screws

- > Acc. to DIN 5200, blade tips acc. to DIN ISO 2380-2
- > Chrome-vanadium steel, matt nickel-plated



mm	mm	mm	kg	Code	No.
3.5	0.6	90	0.010	6437180	173 3,5
4.0	0.8	100	0.013	6437850	173 4
5.5	1.0	125	0.025	6436100	173 5,5
8.0	1.2	150	0.050	6436370	173 8
10.0	1.6	175	0.087	6437930	173 10
12.0	2.0	200	0.127	6436530	173 12

174 CRANKED SCREWDRIVER

for cross-head screws PH

- > Acc. to DIN 5208, tips acc. to DIN ISO 8764-1 PH
- > Chrome-vanadium steel, matt nickel-plated



⊕ PH	mm	mm	kg	Code	No.
1-2	M2 - M5	100	0.029	6436880	174 1
3-4	M6 - M10	200	0.121	6436960	174 3

VARIOUS

149 MAGNETIZER AND DEMAGNETIZER

- > Magnetizes or demagnetizes screwdrivers, tweezers and similar tools made from steel
- > Blue housing, made from high-quality plastic, unbreakable, cadmium-free



L	H	W	kg	Code	No.
52	26	50	0.088	6416500	149

156 S SQUARE BLADED AWL

- > Blue handle with hanging hole
- > Blade bright nickel-plated



mm	mm	kg	Code	No.
100	200	0.084	6424520	156 S